


HK / HKR / HKL

HYDRAULIC COMPRESSORS





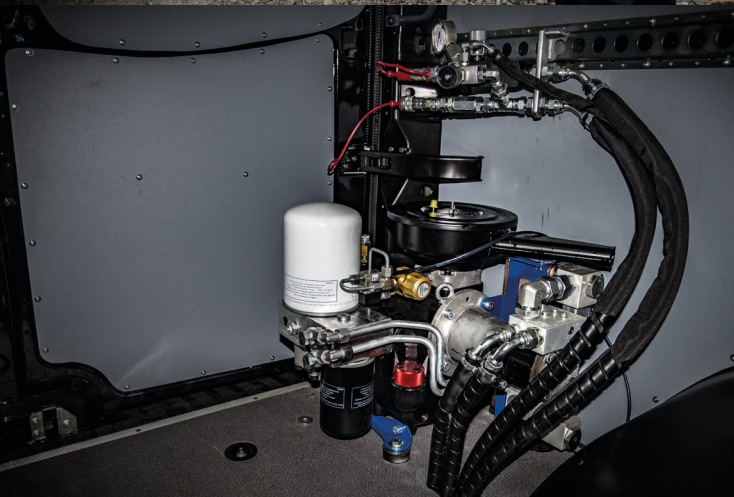



		HK 450	HK 1000
OUTPUT CHARACTERISTICS			
Compressed air (ISO 1217) max.	l / min (cfm)	450 (15.9)	1000 (35.3)
Pressure max.	bar (psi)	8 (116)	12 (174)
HYDRAULIC POWER REQUIREMENTS			
Flow at max. output	l / min (U.S. gpm)	15 (3.96)	35 (9.25)
Pressure max.	bar (psi)	210 (3046)	230 (3337)
OVERALL DIMENSIONS			
Length	mm (in)	530 (20.9)	725 (28.5)
Width	mm (in)	430 (16.9)	490 (19.3)
Height	mm (in)	460 (18.1)	600 (23.6)
Weight	kg (lbs)	35 (77.2)	80 (176.4)
Visit our website www.dynaset.com for detailed information.			

		HKR 1300	HKR 2000	HKR 2500	HKR 4000	HKR 5000	HKR 7500
OUTPUT CHARACTERISTICS							
Compressed air (ISO 1217) max.	l / min (cfm)	1300 (46)	2000 (71)	2500 (88)	4000 (141)	5000 (177)	7500 (265)
Pressure max.	bar (psi)	10 (145)	10 (145)	10 (145)	10 (145)	10 (145)	10 (145)
HYDRAULIC POWER REQUIREMENTS							
Flow at max. output	l / min (U.S. gpm)	37 (9.8)	53 (14.0)	67 (17.7)	104 (27.5)	137 (36.2)	183 (48.9)
Pressure max.	bar (psi)	230 (3300)	230 (3300)	230 (3300)	230 (3300)	230 (3300)	270 (3900)
OVERALL DIMENSIONS							
Length	mm (in)	490 (19.30)	490 (19.30)	490 (19.30)	650 (25.59)	670 (26.38)	779 (30.67)
Width	mm (in)	455 (17.91)	455 (17.91)	455 (17.91)	520 (20.47)	520 (20.47)	622 (24.49)
Height	mm (in)	425 (16.73)	425 (16.73)	425 (16.73)	720 (28.35)	720 (28.35)	809 (31.85)
Weight	kg (lbs)	74 (163.1)	74 (163.1)	74 (163.1)	137 (302)	137 (302)	270 (595.2)
Visit our website www.dynaset.com for detailed information.							

		HKL 400	HKL 801	HKL 1300	HKL 1300 *	HKL 1800
OUTPUT CHARACTERISTICS						
Compressed air (ISO 1217) max.	l / min (cfm)	400 (14.1)	800 (18.2)	1300 (49.9)	1300 (49.9)	1800 (63.5)
Pressure max.	bar (psi)	8 (116)	8 (116)	8 (116)	8 (116)	8 (116)
HYDRAULIC POWER REQUIREMENTS						
Flow at max. output	l / min (U.S. gpm)	24 (6.33)	26 (6.86)	38 (10.03)	46 (12.14)	46 (12.14)
Pressure max.	bar (psi)	250 (3626)	250 (3626)	250 (3626)	250 (3626)	250 (3626)
OVERALL DIMENSIONS						
Length	mm (in)	525 (20.7)	640 (25.2)	640 (25.2)	640 (25.2)	810 (31.9)
Width	mm (in)	250 (9.8)	320 (12.6)	320 (12.6)	320 (12.6)	390 (15.4)
Height	mm (in)	325 (12.8)	520 (20.5)	520 (20.5)	520 (20.5)	620 (24.4)
Weight	kg (lbs)	30 (66.1)	55 (121.3)	55 (121.3)	55 (121.3)	103 (227.1)
* Low pressure model (nominal hydraulic input pressure 170 bar.) HKL models available up to 13 bar. Visit our website www.dynaset.com for detailed information.						

		HKL 2600	HKL 2600 *	HKL 4100	HKL 5000	HKL 7500
OUTPUT CHARACTERISTICS						
Compressed air (ISO 1217) max.	l / min (cfm)	2600 (91.8)	2600 (91.8)	4100 (144.8)	5000 (176.6)	7500 (264.9)
Pressure max.	bar (psi)	8 (116)	8 (116)	8 (116)	8 (116)	8 (116)
HYDRAULIC POWER REQUIREMENTS						
Flow at max. output	l / min (U.S. gpm)	65 (17.16)	82 (21.65)	113 (29.83)	135 (35.64)	150 (39.60)
Pressure max.	bar (psi)	250 (3626)	250 (3626)	250 (3626)	250 (3626)	250 (3626)
OVERALL DIMENSIONS						
Length	mm (in)	810 (31.9)	810 (31.9)	890 (35)	890 (35)	1100 (43.3)
Width	mm (in)	390 (15.4)	390 (15.4)	515 (20.3)	515 (20.3)	890 (35)
Height	mm (in)	620 (24.4)	620 (24.4)	790 (31.1)	790 (31.1)	900 (34.4)
Weight	kg (lbs)	103 (227.1)	103 (227.1)	185 (407.9)	185 (407.9)	330 (727.6)
* Low pressure model (nominal hydraulic input pressure 170 bar.) HKL models available up to 13 bar. Visit our website www.dynaset.com for detailed information.						